



PRO MBR™ REINFORCING FABRIC

2. MANUFACTURER

PROMA ADHESIVES Inc.

9801, Parkway, Anjou, Quebec Canada H1J 1P3

Tel.: 514.852.8585

Fax: 514.852.8225

Toll-free: 1 866.51.PROMA (77662)

Email: info@proma.ca

Web: www.proma.ca

3. PRODUCT DESCRIPTION

PRO MBR REINFORCING FABRIC is a high-performance reinforcing fabric used with PRO MBR and PRO MBR XD waterproofing membranes when applying around corners, coves, drains, seams and for perimeter wall transitions to ensure 100% waterproofing results and to increase tear and puncture resistance. This product is also used with PRO MBR or PRO MBR XD for isolating shrinkage cracks, in plane, up to 3 mm (1/8") wide.

Features

- ◆ Use with PRO MBR or PRO MBR XD waterproofing membranes when applying around corners, coves, drains, seams and for perimeter wall transitions to ensure 100% waterproofing results
- ◆ Use with PRO MBR or PRO MBR XD to isolate shrinkage cracks, in plane, up to 3 mm (1/8") wide
- ◆ Thin, lightweight and uniform
- ◆ Excellent dimensional stability and tensile strength
- ◆ Excellent tear and puncture resistance
- ◆ For interior and exterior institutional, commercial and residential floor, wall and ceiling applications
- ◆ Will not promote mold, mildew or bacteria growth
- ◆ No VOC
- ◆ Exceeds ANSI A118.12 high-performance standards for crack isolation when used with PRO MBR or PRO MBR XD waterproofing membranes
- ◆ Eco friendly for users of the material



Packaging

Roll: 6" x 180' (15 cm x 55 m)

12 rolls per case


Suitable Substrates

- ◆ Dry, completely cured concrete (at least 28 days old)
- ◆ Concrete and masonry blocks
- ◆ Cement backer units (CBU)
- ◆ Cementitious screeds, rendering, leveling coats and mortar beds
- ◆ Gypsum wallboard (INTERIOR dry areas only)
- ◆ Exterior Grade Douglas Fir Plywood, certified CANPLY (SELECT) or (SEL-TF) CSA 121, for INTERIOR Residential Light-Duty Floors in dry areas only*
- ◆ Cementitious Terrazzo floors*
- ◆ Existing unglazed ceramic tile*
- ◆ Stainless steel, inox, metal and ABS drain assemblies*

* With adequate prior preparation as indicated in PROMA's "SURFACE PREPARATION GUIDELINES"

Limitations

- ◆ Do not use at temperatures below 10°C (50°F) or above 35°C (95°F).
- ◆ Do not apply directly over particleboard, chipboard, presswood, Lauan, masonite and other dimensionally unstable materials.
- ◆ Do not use where high moisture and hydrostatic conditions and/or recurring moisture problems exist.

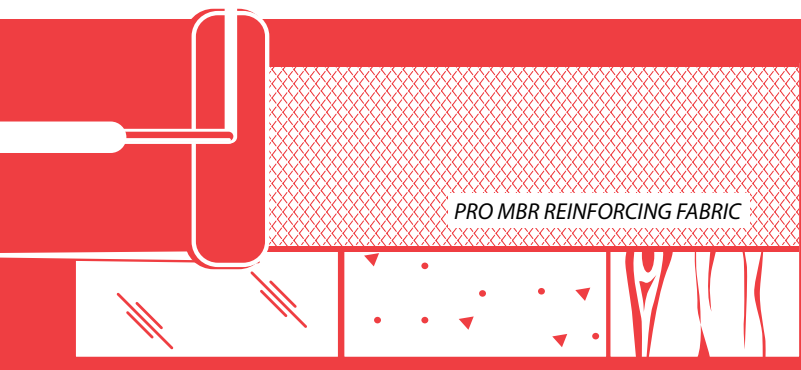

Stainless Steel /
Inox / Metal

Concrete

Exterior-Grade
Plywood





4. TECHNICAL DATA

Applicable Standards

For Additional Information, please refer to the most recent TCNA handbook for ceramic tile installation or the TTMAC Specification Guide 09 30 00 Tile Installation Manual, or visit our website at www.proma.ca.

PHYSICAL PROPERTIES (@23° C [73° F] and 50% RH)	
Finish	Polyester
Coating	PVC
Weight (ASTM D-3776)	2.13 oz/yd ² (72.0 g/m ²)
Pattern	5 x 5 yarns/inch (2 x 2 yarns/cm)
Tensile (ASTM D-5035)	50 x 45 lb/in (445 x 400 N/5 cm)
Shelf life	
60 months if kept in its original unopened packaging and stored in a dry location.	

5. INSTALLATION

Surface Preparation

(Refer to PROMA Surface Preparation Guidelines for complete details)

- ♦ All supporting surfaces must be structurally sound, solid and stable.
- ♦ Surfaces must be clean and free of dust, oil, grease, paint, tar, wax, curing agent, primer, sealer, form release agent or any deleterious substance and debris which may prevent or reduce adhesion.
- ♦ Acids, concentrated alkaline conditions and cleaning chemical residues must be neutralized or removed.
- ♦ All concrete substrates must be completely cured (at least 28 days old), solid, sound, slightly textured and have a direct tensile cohesive strength greater than 1.2 MPa (175 psi) when tested in accordance with ACI 503 R – (Appendix A) procedure.
- ♦ On grade or below grade concrete slabs must be installed over an effective vapor barrier.
- ♦ All concrete substrates must be dry and free of hydrostatic conditions and/or extreme moisture problems. Perform a calcium chloride moisture emission test (ASTM F-1869) on the concrete substrate before proceeding with the installation of the floor.
- ♦ Smooth concrete substrate surfaces must be mechanically roughened in accordance with an engineer-approved procedure (Shot-blasting, scarification, grinding, sand or water-blasting, etc) to completely remove all paint, loosely bonded toppings, loose particles and contaminants and to provide sufficient surface.

Application

PRO MBR REINFORCING FABRIC with PRO MBR or PRO MBR XD as a Waterproofing Membrane

Cracks, corners and coves (floor and wall intersections)

1. Fill all cracks, gaps in corners and coves greater than 1 mm (1/32") with a PROMA polymer modified mortar. Fill space completely, then smooth with a trowel and allow to dry.
2. Apply a coat of PRO MBR or PRO MBR XD over filled cracks, gaps in corners and coves using a paint brush or roller.
3. Embed PRO MBR REINFORCING FABRIC into wet membrane, using the brush or roller to press fabric into the PRO MBR or PRO MBR XD. Remove any bubbles or wrinkles and ensure corners and edges are flat.
4. Allow membrane to dry (turn black), then apply a second coat.

Drains

1. Use a clamping ring-type drain with weep holes for thin-set applications.
2. Apply a coat of PRO MBR or PRO MBR XD to the bottom of the flange (making sure it is in plane and fully supported), then apply around the drain.
3. Embed PRO MBR REINFORCING FABRIC into wet membrane, using the brush or roller to press fabric into the PRO MBR or PRO MBR XD. Remove any bubbles or wrinkles and ensure corners and edges are flat.
3. Allow membrane to dry (turn black), then apply a second coat.
4. After curing, clamp the upper flange onto the membrane and securely tighten. Apply a bead of silicone caulk where the membrane and the flange make contact.

PRO MBR REINFORCING FABRIC with PRO MBR or PRO MBR XD as a Crack Isolation Membrane

1. Apply a coat of PRO MBR or PRO MBR XD over cracks using a paint brush or roller.
2. Embed PRO MBR REINFORCING FABRIC into wet membrane, using the brush or the roller to press fabric into the PRO MBR or PRO MBR XD. Remove any bubbles or wrinkles and ensure corners and edges are flat, then IMMEDIATELY apply a second coat of PRO MBR or PRO MBR XD.

Curing and Protection

- ♦ Protect from dirt, dust and damage from other trades until fully covered by the PRO MBR or PRO MBR XD waterproofing and crack isolation membrane.

Cleaning

Clean tools and hands with water while the product is still fresh.

6. AVAILABILITY AND COST

PROMA products are widely available in Canada and the Northeast United States. To find a distributor of PROMA products, call **toll-free: 1.866.51.PROMA (77662)**.

7. WARRANTY

PROMA warrants that this product is manufactured using quality raw materials and is of merchantable quality and suitable for the purpose for which it was intended. PROMA's liability under this warranty shall be limited to the replacement of its product proven to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising from the use of/or the inability to use this product.

8. MAINTENANCE

Product requires no special maintenance. Do not leave without tile, stone or permanent floor covering or exposed as a wear surface.

9. TECHNICAL SERVICE

For more detailed information on this product, please contact our technical department for proper recommendations and job field assistance. **Toll-free: 1.866.51.PROMA (77662)**.

10. FILING SYSTEM

Additional information is available upon request, or by visiting www.proma.ca.

PROMA Adhesives Inc.

9801, Parkway, Anjou, Quebec Canada H1J 1P3
 Tel.: 514.852.8585
 Fax: 514.852.8225
 Toll-free: 1 866.51.PROMA (77662)
 Email: info@proma.ca

© 2018 PROMA Adhesives, Inc.

